

ARCTIC SUPERFLEX BLUE™

Features

- Fine copper construction built to UL stranding requirements
- Ideal for all automotive, fleet or service applications
- Proven in extreme temperature ranges of -67°F to 221°F (-55°C to 105°C)
- Resistant to the abuses of oil, gasoline, salt water, acids and chemicals
- Highly abrasion resistant
- Can be used in most 600 VOLT applications
- Cables are built using UL/CSA listed or recognized components and processes

Applications

Cable is available in 4, 2 and 1/0 and in convenient lengths of 16', 20' and 25' cable, 4' pigtail

4 AWG

- For most auto and marine uses
- Cars, pickups, diesels, and marine engines

2 AWG

- For heavy equipment
- Trucks, tractors, light planes, most commercial applications

1/0

- For extreme duty requirements
- Earth moving equipment, aircraft, extended distances

Available Configurations

Clamp to clamp

- Provides high mobility & versatility

Harness to clamp

- Ideal for utility vehicles

Harness to harness


- For all fleet vehicles

| Part Number | AWG | Description | Length in Feet | Reference Figure* |
|---------------|-----|--------------------------|----------------|-------------------|
| JC-4-20 | 4 | Jumper Cables | 20' | 1 |
| JC-4-164 | 4 | Jumper Cables w/ Harness | 16' | 2 |
| JC-4-4D | 4 | Harness Only | 4' | 3 |
| JC-2-25 | 2 | Jumper Cables | 25' | 1 |
| JC-2-204 | 2 | Jumper Cables w/ Harness | 20' | 2 |
| JC-2-4D | 2 | Harness Only | 4' | 3 |
| JC-1/0-25 | 1/0 | Jumper Cables | 25' | 1 |
| JC-1/0-254 | 1/0 | Jumper Cables w/ Harness | 25' | 2 |
| JC-1/0-4D | 1/0 | Harness Only | 4' | 3 |
| Made to Order | - | Harness to Harness | - | 4 |

*Reference Figures on this page and opposite.



Clamp to Clamp
Figure 1

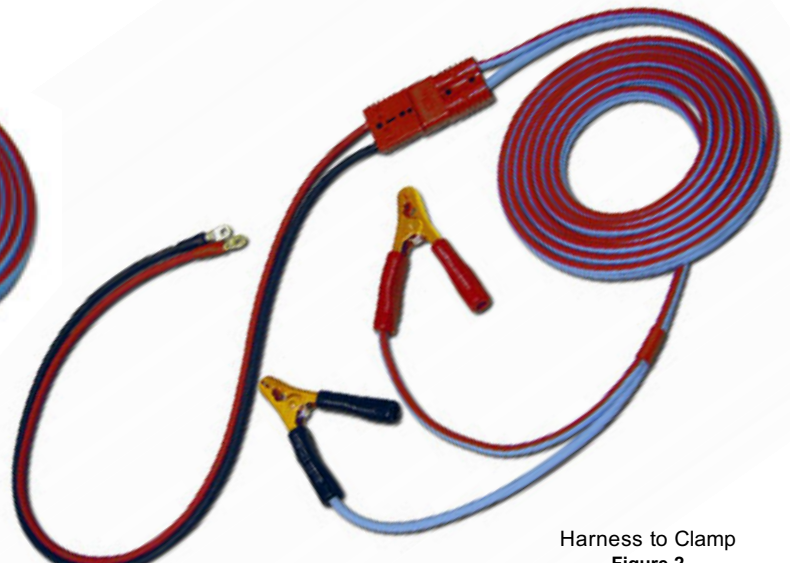

Harness to Clamp
Figure 2