




IlSCO® Aluminum Panelboard Lugs

ORDER ONLINE

Features

- Suitable for use with either copper or aluminum conductors
- Manufactured from high strength 6061-T6 aluminum alloy
- Electroplated with tin for low contact resistance
- Chamfered wire entry provides ease of installation
- UL Listed and CSA Certified for 600 volts, 90°C
- Stacked design saves space and reduces installation time

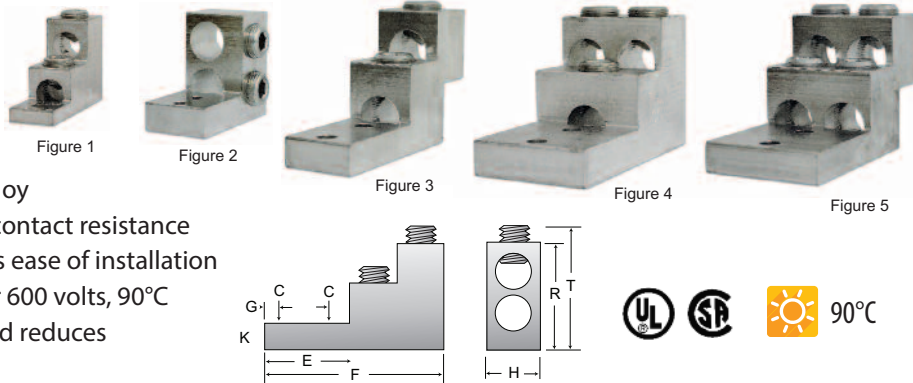

Panelboard Lugs


Part Number	Figure	Wire Range	Bolt Size	Dimensions									Hex Size
				C	E	F	G	H	J	K	R	T	
PB2-300 (D 1601)	1	300 MCM - 6	5/16	21/64	1	3	15/32	1	-	5/16	2	2 5/16	5/16
PB2-500 (D 1318)	2	500 MCM - 4/0	1/4	9/32	1 11/16	2 29/32	1/4	1 7/16	11/16	5/8	2 3/8	1 27/64	3/8
PB2-600 (D 1459)	3	600 MCM - 2	3/8	13/32	2 11/32	4 29/32	3/8	1 1/2	1 3/8	3/4	3	3 29/64	1/2
PB3-600 (D 1282)	4	600 MCM - 2	3/8	13/32	2 11/32	4 29/32	3/8	2 15/32	1 3/8	3/4	3	3 29/64	1/2
PB4-600 (D 1281)	5	600 MCM - 2	3/8	13/32	2 11/32	4 29/32	3/8	2 15/32	1 3/8	3/4	3	3 29/64	1/2
PB2-750 (D 1923)	3	750 MCM - 1/0	3/8	13/32	2 11/32	4 29/32	3/8	1 11/16	1 3/8	3/4	3	3 29/64	1/2
PB4-750 (D 1922)	5	750 MCM - 1/0	3/8	13/32	2 11/32	4 29/32	3/8	3 1/16	1 3/8	3/4	3	3 29/64	1/2
PB2-600-2N	3	600 MCM - 2	1/2	9/16	3 1/8	5 11/16	3/8	1 1/2	1 3/4	3/4	3	3 29/64	1/2
PB2-750-2N	3	750 MCM - 1/0	1/2	9/16	3 1/8	5 11/16	3/8	1 11/16	1 3/4	3/4	3	3 29/64	1/2
PB4-600-2N	5	600 MCM - 2	1/2	9/16	3 1/8	5 11/16	3/8	2 15/32	1 3/4	3/4	3	3 29/64	1/2

IlSCO® Aluminum Splicers/Reducers

ORDER ONLINE

Features

- Rounded bottoms to facilitate taping
- Large screw diameters ensures all wire strands are held securely
- Wire stop in center prevents dissimilar metals coming into contact
- Suitable for use with either copper or aluminum conductors
- Manufactured from high strength 6061-T6 aluminum alloy
- Electroplated with tin for low contact resistance
- Chamfered wire entry provides ease of installation
- UL Listed and CSA Certified for 600 volts, 90°C

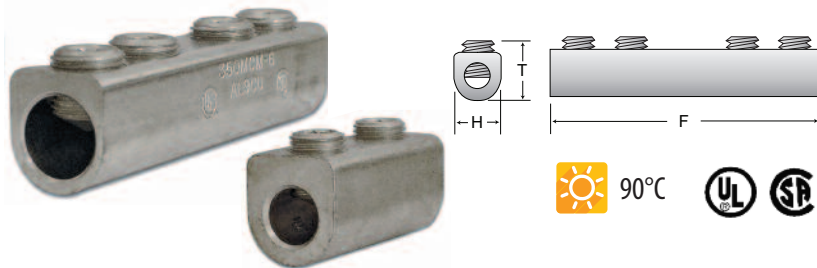

Splicers/Reducers

Part Number	Wire Range	Dimensions			Number of Screws	Screw Diameter	Hex Size
		F	H	T			
SPA-2	2 - 14	1 3/16	29/64	9/16	2	3/8	Slot
SPA-0	1/0 - 14	1 29/32	5/8	11/16	2	7/16	Slot
SPA-4/0	4/0 - 6	2 5/16	1	1 3/32	2	9/16	5/16
SPA-250	250 MCM - 6	4 3/32	1	1 3/32	4	5/8	5/16
SPA-350	350 MCM - 6	4 11/32	1	1 3/32	4	11/16	5/16
SPA-500	500 MCM - 3/0	4 25/32	1 1/4	1 3/8	4	13/16	3/8
SPA-750	750 MCM - 250 MCM	6 1/16	1 7/16	1 5/8	4	15/16	1/2